

# ***T* VIEW**

---

## **T721PL**

---

### Notice to Customers

- This unit is manufactured with precision elements.
- Pay attention to protection against dampness.
- Prevent the hard object from scratching LCD surface.
- LCD may have a few color dots, which is common for the matrix display technology, and doesn't indicate defects or fault.

### **TFT LCD HEADREST MONITOR**




---



## **USER'S MANUAL**

---

## Control panel

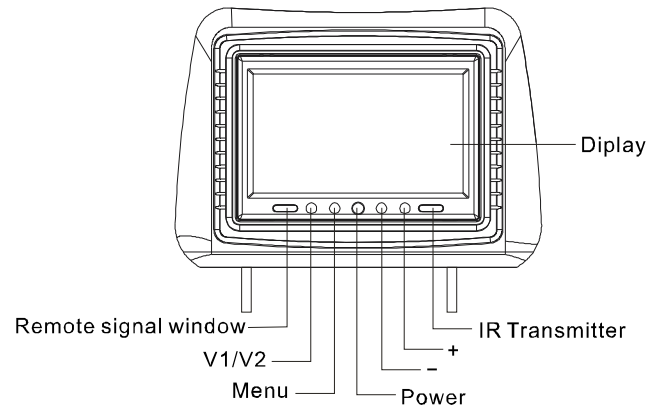


## Remote control

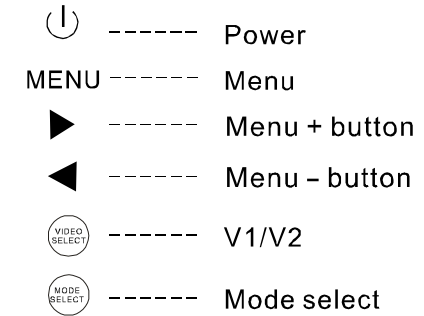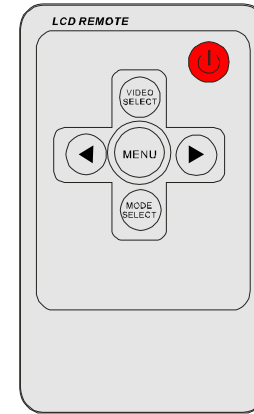

## Performance parameter

- Type: TFT LCD Monitor
- Panel size: 7"
- Aspect ratio: 16:9
- Pixels: 480\*3(RGB)\*234
- Color system: PAL/NTSC
- IR Frequency: 2.3/2.8/3.2/3.8Mhz
- Operation temperature: -5°C ~+40°C
- Power supply: DC 12V
- Power consumption: about 5W
- Tube diameter:0.4/0.48/0.5/0.56inch
- Distance of poles: 5.3-7.3inches adjustable
- Product measurement: 10x7x4.8 inches
- Product net weight: 3.5 lbs

## Method of wiring

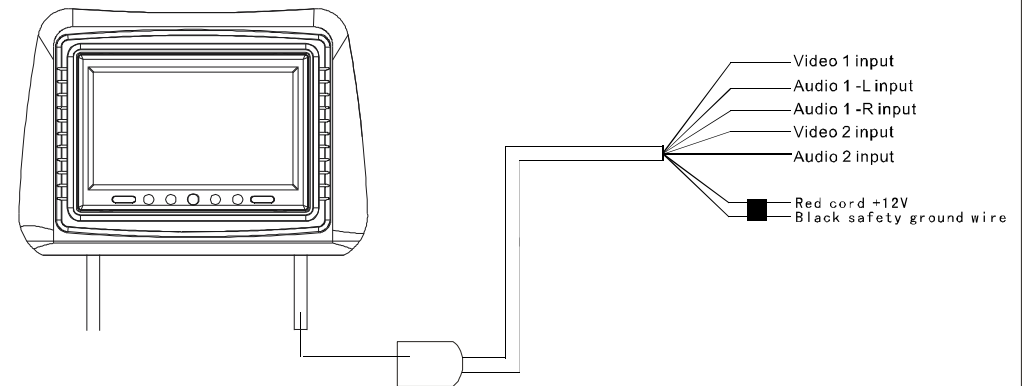

### Notes:

- I .please make the remote control align the infrared - receiving window When you operate it
- II . Please not oppress,drop moisten or dispatch remote control
- III.please not press the key continuously,the gap time atleast is 2 seconds after it's operated.